

**APPLICATION  
FOR  
UNITED STATES LETTERS PATENT**

**APPLICANT(S) NAME:** Papathomas et al.

**TITLE:** LEAD PROTECTIVE COATING COMPOSITION, PROCESS  
AND STRUCTURE THEREOF

**DOCKET NO.** EN995064BV

**INTERNATIONAL BUSINESS MACHINES CORPORATION**

**Certificate of Mailing Under 37 CFR 1.10**

I hereby certify that, on the date shown below, this correspondence is being deposited with the United States Postal Service in an envelope addressed to the Assistant Commissioner for Patents, Washington, D.C., 20231 as "Express Mail Post Office to Addressee".

**"Express Mail" Label Number** EL172581722US

**On** 12/23/99

June M. Mitchell

*Typed or Printed Name of Person Mailing Correspondence*

June M. Mitchell  
*Signature of Person Mailing Correspondence*

12/23/99  
*Date*

## LEAD PROTECTIVE COATING COMPOSITION, PROCESS AND STRUCTURE THEREOF

This application is a continuation in part of the patent application serial number 08/874,220, which is a divisional application of the patent application serial number 08/548,893, which is now abandoned.

### Field of the Invention

The present invention relates to low profile electronic circuit package structures and particularly to such packages for use within light weight, portable devices.

### Background of the Invention

Electronic package assemblies which utilize various organic substrates (e.g., printed circuit boards comprised of epoxy resin or the like material) having one or more electronic packages surface mounted thereon are known. These electronic packages include a relatively flat housing component having therein at least one semiconductor device (integrated circuit chip). This semiconductor device is, in turn, electrically connected to various conductive leads (e.g., copper) which project therefrom. One first level package known in the art is a dual in-line package (DIP). The integrated circuit chips embedded within such integrated circuit chip packages provide various functions (e.g., memory, logic, connectivity) for the overall system. The conductive leads which project from these packages are electrically coupled to respective conductor pads (e.g., copper) or the like which may form the circuitry on an upper surface of the organic substrate. Various solder compositions may be used to provide individual connections between respective pairs of leads and conductors.

Recently, there have been developed integrated circuit chip packages of relatively low profile which include an insulative housing of relatively thin construction.

Such packages are referred to in the art as TSOP's, standing for Thin Small Outline Package. Such devices, being thin, occupy a minimum of height on the respective organic substrate and are further capable of being surface mounted to the substrate's respective circuitry (e.g., conductor pads) using known (e.g., soldering) techniques.

5 These relatively new packages include memory, logic, and connectivity integrated circuit chips as the semiconductor devices thereof. Significantly, these recently developed packages are able to provide such functioning while assuring a compact, low profile, thus representing a substantial savings in space for the final product utilizing same. These surface mounted Thin Small Outline Packages result in a particularly thin  
10 total package of substrate and chips mounted thereon. The resulting packages, exemplified by PCMCIA cards, are preferred for portable computers, entertainment systems, and telecommunications handsets.

"PCMCIA" stands for the Personal Computer Memory Card International Association. PCMCIA cards are the "credit card" peripherals used as memory cards,  
15 including DRAM, SRAM, ROM, and PROM cards, modem-fax cards, mini-hard drive cards, terminal emulator cards, and the like. They are built to a PCMCIA standard. The PCMCIA standard sets the electrical, mechanical, and interface requirements for PCMCIA cards.

The small size of PCMCIA cards is intended to meet the form factor demands  
20 of portable computers. These small cards are approximately the size of a plastic credit card but several times thicker (Type I PCMCIA cards are 3.3 mm thick, Type II PCMCIA cards are 5 mm thick). It should be noted that, as used herein, Type I and Type II refer to the PCMCIA form and fit type standards, and not to the method of surface mount device attachment. PCMCIA cards are described in, for example, R.C.  
25 Alford, "Under The Hood: The PCMCIA Redefines Portability", Byte Magazine, December 1992, pp. 237-242; by Ken Ueltzen "Pushing The Packaging Envelope", Circuit Assembly, March 1992, pp. 32-35, and Richard Nass, "IC-Card Spec Adapts I/O To Memory Card Slot," Electronic Design, January 22, 1992, pp. 45-57.

The Type I PCMCIA card itself is 3.3 millimeters thick from top cover to  
30 bottom cover, with the top cover and bottom cover having a total combined thickness of just 0.4 millimeters. This allows 2.9 millimeters of thickness for a populated, double sided, printed circuit card.

The height limitations of Type I cards, 3.3 mm, requires the use of low profile technologies, for example, either tape automated bonding (TAB) or card-on-board (COB) packaging technologies, both with specially designed low height IC chips, as TSOP IC chips. The thin, small outline package (TSOP) IC chip, with a height of 1.2 mm (0.047 inch), is particularly desirable for double sided Type I PCMCIA cards. Its low profile allows population of both sides of the PCMCIA printed circuit card.

In an alternative IC chip technology a paper thin small outline package (PTSOP) having a height of just 0.5 mm (0.020 inch) is utilized, allowing two printed circuit cards to be carried in a single PCMCIA card package. The lead pitch for TSOP IC chips is 0.5 mm (0.019 inch). Memory printed circuit cards are populated with 0.019 inch to 0.025 inch lead pitch IC chips, with approximately 1000 solder joints per printed circuit card.

It has been found that when TSOP packages, as well as similar thin packages, are surface mounted on organic substrates (and particularly those of epoxy resin or perfluorocarbon dielectric material) of relatively thick configuration (e.g., greater than about 0.050 inches thick), relatively significant thermal stress is placed on the solder-lead joints, which thermal stress can in turn adversely effect such joints, possibly causing separation thereof. Such resulting separation may cause disconnection between the lead and solder, thereby rendering the total package inoperative. Such thermal stress is caused during operation of the package as a result of relatively substantial differences in the coefficients of thermal expansion (CTE) of the organic substrate and the coefficients of expansion (CTE) of various other elements (e.g., the conductive leads, solder and package housing). Such differences are even more pronounced when thicker multi-layer organic substrates (e.g., those including several conductive layers therein which function as signal, power or ground planes) are utilized. Multilayer substrates are often desired in the computer, electronics, and telecommunications industries in order to provide additional functioning within a single package, especially a package containing a plurality of multi-function integrated circuit chips.

A clear need exists for an electronic package assembly which permits the utilization of electronic packages such as those of the TSOP variety to be effectively utilized on organic substrates, and particularly multilayer substrates.

## Summary of the Invention

It is, therefore, a primary object of the present invention to enhance the electronic package assembly art.

5 It is another object of the invention to provide an electronic package assembly which obviates the aforementioned thermal stress problem.

It is yet another object of the invention to provide such a package which can be produced on a relatively large scale, to thus benefit from the several advantages (e.g., lower cost) associated therewith.

10 It is yet a further object of the invention to provide a photopolymerized resin, formed of an epoxy resin or a cyanate monomer, a photoinitiator, and a dispersed phase of particulate silica, that is useful to obviate the aforementioned thermal stress problem in electronic circuit packages.

15 In accordance with one aspect of the invention, there is provided an electronic package assembly which comprises an organic substrate including a surface thereon having a plurality of electrical conductors positioned on the surface, an electronic package including an insulative integrated circuit chip housing located on or above the substrate's surface and including sides which include a plurality of conductive leads projecting therefrom, individual quantities of solder for substantially covering  
20 respective pairs of one such lead and a respective conductor, and encapsulant material located on these quantities of solder for substantially covering the solder so as to substantially prevent electrical disconnection between the conductive leads and the solder during operation of the electronic package assembly.

Encapsulant compositions are also disclosed in accordance with the invention. The encapsulant compositions include an epoxy resin or a cyanate monomer, a  
25 photoinitiator, and a dispersed phase of particulate silica. Where the polymer is an epoxy resin it is one having a plurality of reactive 1,2-epoxy groups. The epoxy resin is chosen from the group consisting of monomeric, polymeric, saturated, unsaturated, aliphatic, cycloaliphatic, aromatic, and heterocyclic epoxides, or a substituted epoxide, wherein the substituents are chosen from the group consisting of hydroxyl groups, ether  
30 radicals, halogen atoms, and combinations thereof, or an epoxy polyether.

Alternatively the resin is formed from cyanate esters that have two or more

OCN groups and are curable through cyclotrimerization.

5 The resin compositions preferably include a toughening agent to improve the fracture properties of the compositions. The toughening agent is preferably miscible with ~~or~~ capable of forming a stable suspension in the compositions. Further, when added to the compositions, the toughening agent preferably does not interfere with the cationic curing mechanism of the compositions and does not significantly affect the thermal and mechanical properties of the cured resin compositions. Preferred toughening agents include rubber or elastomers, either as discrete particles or reacted with the epoxy resins, epoxy functionalized flexibilizers, engineering thermoplastics, and amine or hydroxy-terminated thermoplastic oligomers.

10 The photoinitiator is a aryldiazonium photoinitiator, such as onium salt chosen from the group consisting of "onium" salts with anions  $\text{BF}_4^-$ ,  $\text{PF}_6^-$ ,  $\text{AsF}_6^-$  or  $\text{SbF}_6^-$ .

#### Brief Description of the Drawings

15 The invention may be understood by reference to the figures appended hereto, in which

FIG. 1 is a partial perspective view of an electronic package assembly in accordance with one embodiment of the invention, prior to having encapsulant material added thereto;

20 FIG. 2 is a perspective view, similar to FIG. 1, having encapsulant material applied to two opposing sides thereof and onto the electrically conductive leads (not shown) which project from these sides;

FIG. 3 is a partial elevational view, in section and on a much enlarged scale over the views in FIGs. 1 and 2, illustrating one of the sides of the invention's package having encapsulant located over the conductive leads projecting therefrom; and

25 FIG. 4 is a perspective view, similar to the views in FIGs. 1 and 2, showing encapsulant material about the entire periphery (four sides) of the invention's package housing.

## Detailed Description of the Preferred Embodiments

According to our invention we provide an encapsulant having adequate thixotropy for solder joints in PCMCIA Thin Small Outline Packages (TSOPs) and a method of enhancing the robustness of such devices.

5           Electronic package structures with which the encapsulant is useful are shown in FIGURES 1-4, appended hereto. In FIG. 1, there is shown a partial view of an electronic package assembly 10 in accordance with a preferred embodiment of the invention. Package assembly 10 includes an organic substrate 11 and an integrated circuit chip electronic package 13 designed for being positioned on substrate 11 so as to be electrically connected to circuitry 15 thereof. Circuitry 15 is represented,  
10           illustratively, as a plurality of electrical conductors 17 located on an upper planar surface 19 of substrate 11. It is understood that integrated circuit chip package 13, which includes a plurality of electrically conductive leads 21 projecting from the sides thereof, is designed for being positioned on substrate 11 such that each of the conductor leads 21 is in turn electrically connected to a respective one or more of the conductors 17. Only a few conductors 17 are shown, for illustrative purposes. It is further  
15           understood that each lead may be connected to other forms of conductors which may in turn form part of substrate 11, including plated through holes having appropriate land sections (not shown), which plated through holes are in turn electrically coupled to various internal conductors (e.g., signal, power or ground planes 23, as shown in FIG.  
20           3). Such plated through holes, lands, and other conductors are typically comprised of electrically conductive material (e.g., copper, chrome-copper-chrome, etc.) and are provided on a surface such as planar surface 19 or within substrate 11 in accordance with procedures known in the art and further description is thus not believed necessary.

25           The organic substrate 11 is preferably a multilayered printed circuit board having circuitry 15 located on at least its planar upper surface 19, the board comprised of a dielectric material 25 (see also FIGs. 2-4) of known composition. Preferably, this dielectric material is epoxy resin reinforced with fiberglass, also referred to in the industry as FR-4 material. Alternatively the dielectric material may be a fluorocarbon  
30           resin or a woven or nonwoven aramid structure impregnated with a thermosetting resin. In one example of the invention, substrate 11 may include a plurality of individual

conductive layers, e.g., from about eight to ten individual conductive layers. The invention is not limited to this number of conductive layers, however, in that other numbers (more or less) may be provided.

5 The integrated circuit chip package 13 includes an electrically insulative integrated circuit chip housing 31 of known plastic material. The preferred configuration for integrated circuit chip housing 31 is, as shown in FIGs. 1, 2 and 4, substantially rectangular having a total of four sides 33, 34, 35 and 36. In one example of the invention, integrated circuit chip housing 31 possessed a length (dimension "L" in FIG. 1) of about 0.750 inch and a width (dimension "W" in FIG. 1) of only about 0.300  
10 inch. Each of the sides, or an opposite pair of the sides, include a plurality of the conductive leads 21 projecting therefrom.

Of further significance in a TSOP structure, integrated circuit chip housing 31 possesses a thickness of from only about 0.030 inch to about 0.050 inch, this thickness represented by the dimension "T" in FIG. 3. Further, integrated circuit chip housing 31  
15 may be positioned at a slight gap (represented by the dimension "S" in FIG. 3) of only about 0.001 inch to about 0.003 inch from the circuitry 15 on surface 19. In this embodiment, it is thus seen that this relatively flat package occupies a total height of only about 0.033 to about 0.053 inches from the upper surface, including circuitry 17, of substrate 11. Although a small gap is shown in FIG. 2, the invention is also applicable  
20 to assemblies wherein the plastic housing of package 13 rests directly on (bottoms out) the upper surface 19 and/or circuitry 15.

In addition to the four sides 33, 34, 35 and 36, the flat package integrated circuit chip housing 31 also includes relatively planar upper and lower surfaces 37 and 38, respectively.

25 Integrated circuit chip package 13 further includes a semiconductor device (a silicon chip) located within the plastic integrated circuit chip housing 31. This semiconductor device is represented, illustratively, by the numeral 41 and is shown in phantom in FIG. 3. Preferably, device 41 is electrically connected to the respective conductive leads 21 (only one shown in FIG. 3) by wire bonding or the like, such a wire  
30 being represented by the numeral 43 and shown in phantom in FIG. 3. It is understood that device 41 and wire 43 are shown in FIG. 3 for illustration purposes only and not meant to limit the invention to the location, connection or relative sizes depicted. In



such a package, each of the projecting conductive leads 21 is internally coupled to a lead frame or the like (not shown) and individually project from the respective sides of the housing in a manner as shown herein. As such, each of these leads is preferably of the curved configuration particularly shown in FIG. 3, including a terminal end 51 which depends downwardly from the package housing for being positioned on substrate 11. As stated, each conductive lead 21 is designed for being electrically coupled to a respective conductor 17 of substrate 11. Each of the conductive leads 21 of the invention are preferably of copper and have a thickness of only about 0.010 inch, these leads projecting a distance (dimension "PL" in FIG. 2) of only about 0.025 inch from the respective side (34 in FIG. 3) of integrated circuit chip housing 31.

To assure sound electrical connection between leads 21 and the respective conductor 17, a quantity of solder 53 is applied to substantially cover each mating pair of leads and conductors. That is, a singular quantity of solder is applied to substantially cover one lead and at least a portion of the respective conductor to which lead 21 is electrically coupled. In one example of the invention, each quantity of solder was comprised of 63:37 (tin:lead) solder. It is to be understood that other solder compositions may be utilized. It is also to be understood in the drawings that although only one quantity of solder 53 is shown in FIG. 3, that additional quantities are provided to cover the other paired conductor-lead embodiments. Such solder is not shown in FIG. 1 for clarity. It is understood, therefore, that in the embodiment depicted in FIG. 1, a total of sixteen individual quantities of solder will be provided. In preferred form, solder 53 is applied to the respective conductor 17 sites in paste form prior to positioning of package 13 on substrate 11. A screening operation is frequently and preferably used, following which the package is aligned such that each lead 21 will engage a respective solder paste site. The package and substrate subassembly is then placed within, e.g., passed through, a hot air oven (furnace) and heated to a predetermined temperature to effect solder paste reflow onto the respective leads, the result being the solder configuration as approximately represented in FIG. 3. If using a 63:37 tin:lead solder, this preferred temperature for attaining reflow is preferably about 185 degrees Celsius (C). This temperature does not adversely affect the package or substrate components. The configuration for solder 53 as depicted in FIG. 3 shows the solder to substantially cover the pin 21, almost substantially entirely surrounding the

pin. Additionally, the solder 53 is also shown to cover at least a portion of the conductor 17 on substrate 11. Should conductor 17 be in the form of a land or the like element (which in turn may be electrically coupled to a plated through hole extending within substrate 11), the solder 53 will cover a large portion, if not all of this land conductor.

As shown in the FIGURES, a quantity of encapsulant material 61 is applied to the opposing sides 33 and 34 of integrated circuit chip housing 31 so as to abut against these sides and substantially cover the solder 53. The encapsulant material 61, as shown in FIG. 3, substantially surrounds the entire quantity of solder 53 for each of the paired lead-conductor combinations. To be noted is that the encapsulant 61 is not shown in FIG. 1. This is to enable illustration of the assembly with solder exposed. But encapsulant 61 is provided in FIG. 2. Encapsulant 61 is applied in unpolymerized form, e.g., liquid thixotropic form, with a suitable photoinitiator or photocatalyst, following the solder reflow (and solder solidification) step. In a preferred embodiment, encapsulant 61 is dispensed using at least one syringe, syringe pump, or other dispenser means. This dispensing of encapsulant may occur following a pre-heating of the substrate 11 and integrated circuit chip electronic package 31 located thereon for a predetermined time period. The substrate 11 having the integrated circuit chip package 31 soldered in position thereon, is heated to drive off the moisture therein, e.g., to within a range of from about 65 degrees C to about 85 degrees C for about one to two hours. The purpose of the heating is to drive off any undesirable moisture which may collect within the dielectric material which forms part of substrate 11. A hot air oven is preferably used to accomplish this heating. Subsequently, encapsulant 61 may be dispensed while the substrate 11 retains much of the heat from this preheating step. Following encapsulant dispense, the board with mounted package and encapsulant is positioned under a source of ultra-violet (UV) radiation and subjected to UV radiation to effect polymerization, i.e., photopolymerization, of the encapsulant 61.

A preferred encapsulant material for use in the invention is a polymer resin, and particularly an epoxy or a cyanate, or combinations thereof. This encapsulant is a flowable, liquid epoxy or cyanate material, or a combination thereof, which features the proper and controlled thixotropy to cover the leads and low stress. Both of these features are desirable for use with package structures of the type described herein.

When properly UV photocured, the encapsulant material provides a low thermal expansion and high glass transition to assure enhanced protection (e.g., during thermal cycling). Such an encapsulant possesses a coefficient of linear thermal expansion of about 26 to 39 ppm/degrees C and a glass transition temperature of 100 to 160 degrees C. The invention is not to be limited to use of the above encapsulant material, however, in that other ultraviolet (UV) photocurable encapsulants may be successfully used herein.

It has been discovered that application of encapsulant material of the type described above to the designated locations on assembly 10 has served to significantly increase the operational life of such package assemblies, particularly those of the low profile configuration described above. By way of example, operational life was shown to be extended by a factor of about 2-5 times over package assemblies wherein encapsulant was excluded. Such encapsulant has proven to reinforce the lead-solder bond so as to, significantly, substantially prevent separation between the solder and lead elements, which separation in turn may break the connection there between and possibly render at least part of the package assembly 10 inoperative. More specifically, this encapsulant material provides such protection during package assembly operation wherein heat is generated by both the substrate and various package elements (e.g. internal silicon chip).

By way of example, the following illustrate the significant differences in the coefficients of thermal expansion (CTE) of the various elements used in one embodiment of the invention.

	ELEMENT	CTE ( $10^{-6}$ in/in/ $^{\circ}$ C)
	Organic Substrate (FR-4)	10-21
	Conductive Leads (Copper Alloy)	45
5	IC Chip Encased In Plastic Housing	7
	Solder	28
	Encapsulant	26-39

10 Absent such protection afforded by encapsulant material 61, these substantially different coefficients of expansion can result in cracking or similar deformation of the solder-lead joints, such cracking possibly causing failure thereof. The use of encapsulant material of the type defined herein, applied in the manner described herein, has resulted in a much improved package assembly with prolonged life over non-encapsulated assemblies.

15 Although it is shown in FIG. 3 that encapsulant 61 is spaced a slight distance from the lower part of side 34 of integrated circuit chip housing 31 (thus forming a gap there between), this is not meant to limit the invention. That is, it is also possible in accordance with the teachings herein to dispense encapsulant material 61 under part or all of the under surface of integrated circuit chip housing 31, assuming of course integrated circuit chip housing 31 is spaced at a gap such as depicted in FIG. 3. Such partial positioning of encapsulant is shown in phantom in FIG. 3 and represented by the numeral 63.

20 In FIG. 4, all four sides 33, 34, 35 and 36 of integrated circuit chip housing 31 are shown to have encapsulant material 61 located thereabout. As stated, only two of these sides (e.g., 33 and 34) will include conductive leads projecting therefrom. However, it has been determined that the addition of encapsulant about this entire outer periphery (all four sides) of the package housing has proven to even further strengthen (reinforce) the aforementioned lead-solder joints. Such added reinforcement is considered accomplished because of the ability of the ultra violet photocured encapsulant material to act against the linear expansion of the package's housing during operation. It has not been determined necessary to provide encapsulant to the top surface 37.

The uncured encapsulant is composed of an epoxy resin, a cyanate, or combinations thereof. The encapsulant also includes a modifier to enhance the fracture

toughness, a silica filler, and a suitable photoinitiator. Preferred photoinitiators are triarylsulfonium hexafluoroantimonates, such as Union Carbide Cyracure UVI 6974 photoinitiator.

5 The polyepoxide-containing compositions which can be cured into crosslinked networks for use in the present invention comprise organic materials having a plurality of reactive 1,2-epoxy groups. These polyepoxide materials can be monomeric or polymeric, saturated or unsaturated, aliphatic, cycloaliphatic, aromatic or heterocyclic, and they may be substituted if desired with other substituents besides the epoxy groups, e.g., hydroxyl groups, ether radicals, halogen atoms, and the like.

10 A widely used class of polyepoxides which can be employed according to the practice of the present invention encompasses epoxy polyethers obtained by reacting an epihalohydrin, such as epichlorohydrin, epibromohydrin, epiiodohydrin, and the like, with either a polyhydric phenol or a polyhydric alcohol. In addition, the phenolic rings, may have other substituents besides the hydroxyl group, for example, lower alkyl  
15 groups containing from one to four carbon atoms, e.g., methyl, ethyl, propyl, isopropyl, butyl, sec-butyl and tert-butyl groups, halogen atoms, i.e., fluorine, chlorine, bromine or iodine, and the like.

An illustrative, but by no means exhaustive listing of the dihydric phenols includes 4,4'-dihydroxydiphenylmethane, (Bis-phenol A), 2,4'-  
20 dihydroxydiphenylmethane, 3,3'- dihydroxydiphenyldiethylmethane, 3,4'- dihydroxydiphenylmethylpropylmethane, 2,3'-dihydroxydiphenylethylphenylmethane, 4,4'-dihydroxydiphenylpropylphenylmethane, 4,4'- dihydroxydiphenylbutylphenylmethane, 2,2'-dihydroxydiphenylditolylmethane, 4,4'- dihydroxydiphenyltolylmethylmethane, and the like.

25 Other polyhydric phenols which could also be reacted with an epihalohydrin to provide epoxy polyethers are such compounds as resorcinol, hydroquinone, substituted hydroquinones, e.g., p-tert-butylhydroquinone, and the like, indanols such as those disclosed in U.S. Pat. No. 2,754,285 and polyhydric phenols having two hydroxyl aryl  
30 groups separated by an aliphatic chain of at least six carbon atoms in length. The chain is attached by carbon-to-carbon bonding to nuclear carbon atoms of the hydroxylaryl groups. All of such glycidyl ethers can be prepared by the method described in U.S. Pat. No. 2,538,072.

Among the polyhydric alcohols which can be reacted with an epihalohydrin to provide epoxy polyethers are such compounds as ethylene glycols, pentane diols, bis-(4-hydroxycyclohexyl)-dimethylmethane, 1,4-dimethylolbenzene, glycerol, 1,2,6-hexanetriol, trimethylol propane, manitol, sorbitol, erythritol, pentaerythritol, their  
5 dimers, trimers and higher polymers, e.g., polyethylene glycols, polypropylene glycols, triglycerol, dipentaerythritol and the like, polyallyl alcohol, polyvinyl alcohol, polyhydric thioethers such as 2,2'-dihydroxydiethyl sulfide, 2,2'-3,3'-tetrahydroxydipropyl sulfide and the like, mercapto alcohols such as monothio-glycerol, dithioglycerol and the like, polyhydric alcohol partial esters such as monostearin,  
10 pentaerythritol monoacetate; polyhydric alcohol partial esters such as monostearin, pentaerythritol monoacetate, and halogenated polyhydric alcohols such as the monochlorohydrins of glycerol, sorbitol, pentaerythritol and the like.

Epoxidized novolacs are obtained by reacting, preferably in the presence of basic catalyst such as sodium hydroxide, an epihalohydrin such as epichlorohydrin with  
15 the resinous condensate of an aldehyde, e.g., formaldehyde, and either a monohydric phenol, e.g., phenol or cresol or a polyhydric phenol, e.g. bisphenol A.

For reference purposes a comprehensive disclosure of such epoxy compositions can be found in the text entitled Epoxy resins, Chemistry and Technology, by A. May and Y. Tanaka, Marcel Decker, Inc., New York (1973) and the article "Resins for  
20 Aerospace" by C. A. May, Applied Polymer Science, ACS Symposium Series 285, R.W. Phehlein, eds., American Chemical Society, p.559 (1985).


Particularly suitable such epoxy resins include, for example, the diglycidyl ethers of resorcinol, catechol, hydroquinone, biphenol, bisphenol A, bisphenol K, tetrabromobisphenol A, phenol-aldehyde novolac resins, alkyl substituted phenol-  
25 aldehyde novolac resins, alkyl substituted phenol-formaldehyde resins, phenol-hydroxybenzaldehyde resins, cresol-hydroxybenzaldehyde resins, dicyclopentadiene-phenol resins, dicyclopentadiene-substituted phenol resins, bisphenol F, tetramethylbiphenol, tetramethyltetrabromobiphenol, tetramethyltribromobiphenol, tetrachlorobisphenol A, combinations thereof and the like.

Also suitable as the epoxide compound which can be employed in the present invention include those partially advanced epoxy resins disclosed in U.S. Pat. No.  
30 4,594,291.

Also suitable as the epoxide compound are the polyglycidyl ethers of compounds having an average of more than one aliphatic hydroxyl per molecule such as for example, aliphatic diols, polyether diols, polyether tetraols, and any combination thereof. Also suitable are the alkylene oxide adducts of compounds containing an average of more than one aromatic hydroxyl group per molecule such as, for example, the ethylene oxide, propylene oxide, or butylene oxide adducts of dihydroxy phenols, biphenols, bisphenols, halogenated bisphenols, alkylated bisphenols, trisphenols, phenol-aldehyde novolac resins, halogenated phenol-aldehyde novolac resins, alkylated phenol-aldehyde novolac resins, hydrocarbon-phenol resins, hydrocarbon-halogenated phenol resins, or hydrocarbon-alkylated resins, or any combination thereof.

The reactions between epoxies and phenols and/or carboxylic acids (or anhydrides) have been extensively studied and many patents have issued which describe these well known classes or reactants. See, for example U.S. Pat. Nos. 2,216,099, 3,377,406, 3,547,885, 2,633,458, 3,477,990, 3,694,407, 2,658,885, 3,547,881, 3,738,862, Canadian Pat. No. 893,191, German Pat. DT No. 2,206,218, and the text "Handbook of Epoxy Resins" by H. Lee and K. Neville, McGraw Hill, NY (1967).


The epoxy resin monomers or prepolymers including glycidyl ethers of various phenolic compounds are suitable for the present invention and widely commercially available.

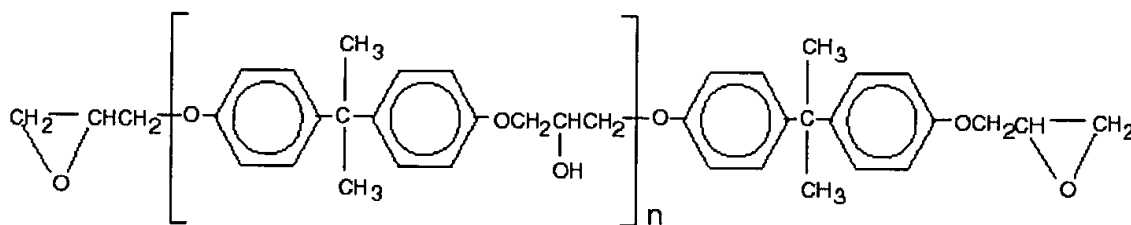

Formula 1

Formula 1 represents a type of glycidyl ethers of bisphenol A suitable for the present invention. In Formula 1, n ranges from 0 to 12. The glycidyl ethers represented in Formula 1 can have different molecular weights and viscosities. They are available from a number of manufacturers. For example, they are available from Shell Chemical Company under the trademarks EPON 825, EPON 826, and EPON 828. They are also available from DOW Chemical Company under the trademarks D.E.R. 332, D.E.R. 330, D.E.R. 331, D.E.R. 383, D.E.R. 661, TACTIX 123, TACTIX 138, and TACTIX 177.

In addition, they are available from Ciba-Geigy Corporation under the trademarks ARALDITE GY 6008, ARALDITE GY 6010, and ARALDITE GY 2600. Flame retardant fluorinated or brominated bisphenol type epoxy resins can also be used as the epoxy resin of the present invention. By way of example, they are available from DOW Chemical Company under the trademarks D.E.R. 542 and D.E.R. 566-A80.

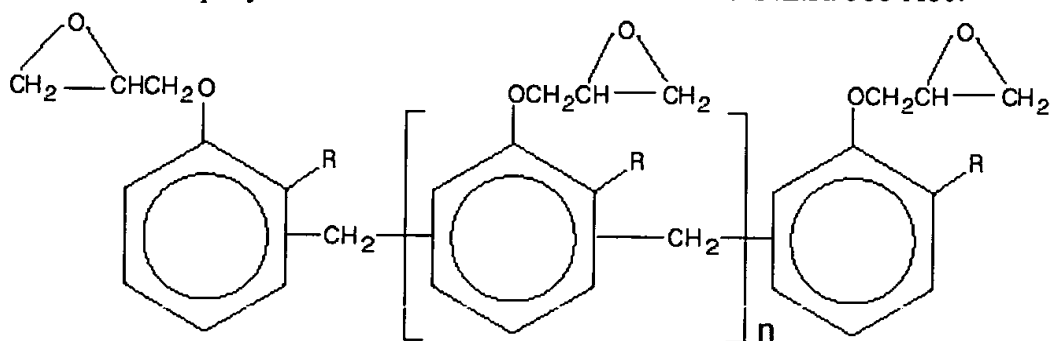


Formula 2

Formula 2 represents a class of phenol novolac and cresol novolac glycidyl ethers suitable for the present invention. In Formula 2, n ranges from 0 to 8. For epoxy phenolic novolacs, R = H in Formula 2. For epoxy xresol novolacs, R = CH<sub>3</sub> in Formula 2. Formula 2 also represents bisphenol F epoxy resins with R = H and n ranges from 0 to 0.15. These materials are also widely available from commercial manufacturers. For example, they are available from Shell Chemical Company under the trademarks EPON 862, EPON 155, and SU-8. They are also available from DOW Chemical Company under the trademarks D.E.R. 354, D.E.N. 431, D.E.N. 438, and D.E.R.439. In addition, they are available from Ciba-Geigy Corporation under the trademarks ARALDITE PY 306, ARALDITE EPN 1139, ARALDITE EPN 1138, ARALDITE GY 281, ARALDITE GY 285, ARALDITE GY 302-2, ARALDITE LY 9703, ARALDITE XD 4955, and ARALDITE ECN 9511.

Tetraglycidyl ether or tetrakis (4-hydroxyphenyl) ethane, diglycidyl ether of 9, 9-bis (4-hydroxyphenyl) fluorene are polyfunctional glycidyl ethers are suitable for the resin of the present invention, especially in the high performance applications such as heavy mechanical loads under high temperature and harsh environment. The tetraglycidyl ether is commercially available from Shell Chemical Company under the trademark EPON 1031 and from Ciba-Geigy Corporation under the trademark



ARALDITE MT 0163. The diglycidyl ether is commercially available from Shell Chemical Company under the trademark EPON HPT 1079.

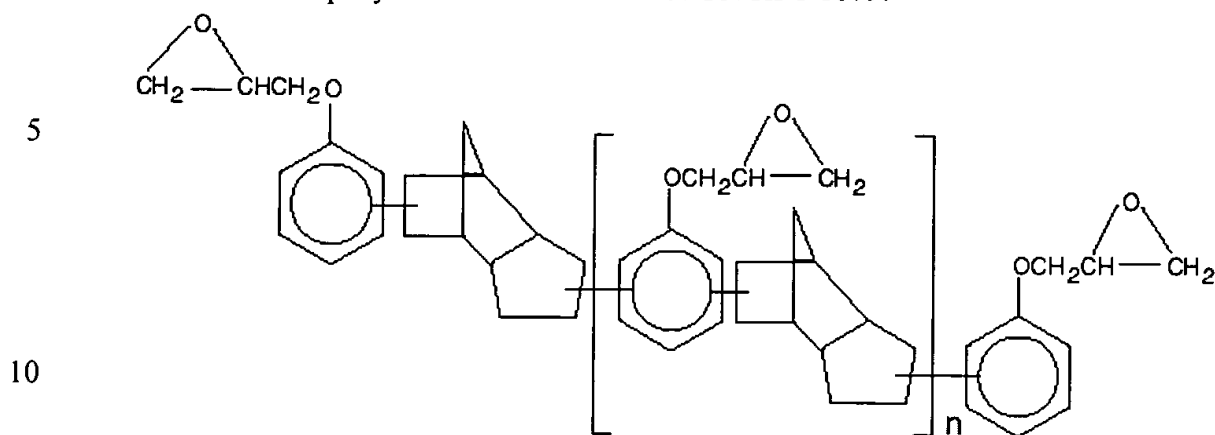

### Formula 3

15

Formula 3 represents glycidyl ether of the condensation product of dicyclopentadiene and phenol suitable for the present invention. In Formula 3, n is approximately 0.2. The glycidyl ether is commercially available from DOW Chemical Company under the trademark TACTIX 556.

20

Another ether suitable for the present invention is the triglycidyl ether of tris (hydroxyphenyl) methane, which is available from Dow Chemical Company under the trademark TACTIX 742 or under the trademark XD9053.

25


It should be noted that EPON 1031, EPON HPT 1079, TACTIX 556, TACTIX 742, and XD 9053 are either high viscosity liquids or solids at room temperature. Therefore, it is preferable to blend these materials with a low viscosity bisphenol A or bisphenol F based diglycidyl ether or reactive diluents. The resulting blends are less viscous at ambient temperatures and are easily processed. Even though some heating may be beneficial for adequate flow, the temperatures needed for easy process is sufficiently low to avoid thermal curing of the epoxy group. These blends have good overall combination of low viscosity in the uncured state and high glass transition temperature, flexural strength, and modulus when cured. It is particularly advantageous

30

to blend a high performance semi-solid epoxy such as TACTIX 556, TACTIX 742, and EPON HPT 1079 with a low viscosity bisphenol A or bisphenol F based glycidyl ether epoxy such as EPON 862, TACTIS 123 and a reactive diluent.

The above mentioned resin monomer can also be modified by mixing it with various additives. Suitable additives include polyols such as ethylene glycol, propylene glycol, 1,3-butylene glycol, 1,4-butylene glycol, etc. Aromatic diphenols and polyphenolic compounds can also be used to modify the epoxy resin. Reactive diluents containing vinyl, acrylate, or methacrylate may be employed to adjust the reactivity, glass transition temperature, or mechanical properties of the epoxy resin. In addition, reactive diluents based on monofunctional or polyfunctional ethers may be used to reduce the viscosity or modify the resin systems.

The preferred cycloaliphatic epoxy resins are non-glycidyl ether epoxides containing more than one 1,2 epoxy group per molecule. These are generally prepared by epoxidizing unsaturated aromatic hydrocarbon compounds, such as cyclo-olefins, using hydrogen peroxide or peracids such as peracetic acid or perbenzoic acid. Such non-glycidyl ether cycloaliphatic epoxy resins have a ring structure wherein the epoxide group is part of the ring or is attached to the ring structure. These epoxy resins may also contain ester linkages. Suitable nonglycidyl ether cycloaliphatic epoxy resins have the following structures:

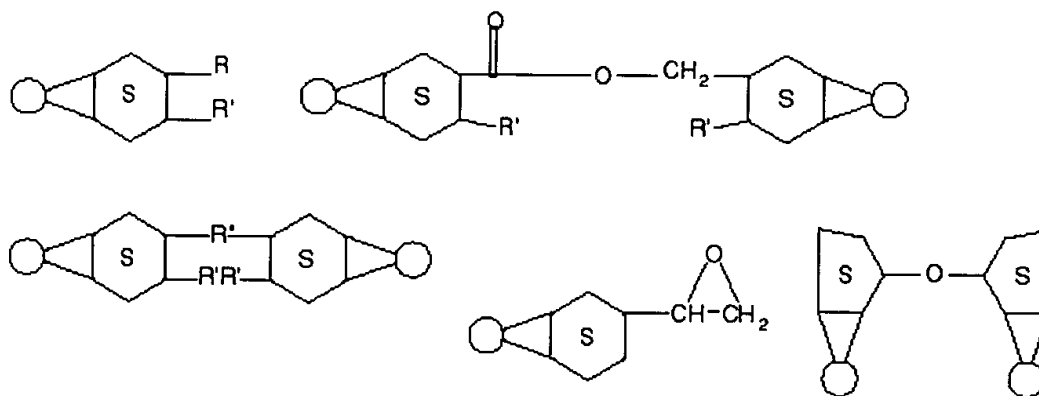

wherein: S is a saturated ring structure; R is selected from the group of  $\text{CHOCH}_2$ ,  $\text{O}(\text{CH}_2)_n\text{CHOCH}_2$ , and  $\text{OC}(\text{CH}_3)_2\text{CHOCH}_2$  radicals;  $n = 1$  to  $5$ ;  $\text{R}'$  is selected from the group consisting of hydrogen, methyl, ethyl, propyl, butyl, and benzyl radicals; and  $\text{R}''$  is selected from the group consisting of  $\text{CH}_2\text{OOC}$  and  $\text{CH}_2\text{OOC}(\text{CH}_2)_4\text{COO}$  radicals.

Examples of suitable non-glycidyl ether cycloaliphatic epoxides include 3,4-epoxycyclohexylmethyl-3,4-epoxycyclohexane carboxylate; vinylcyclohexane dioxide which contains two epoxide groups, one of which is part of a ring structure; 3,4-epoxy-

6-methylcyclohexylmethyl-3,4-epoxycyclohexane carboxylate, and dicyclopentadiene dioxide.

Other cycloaliphatic epoxy resins are suitable, including glycidyl ethers such as: 1,2-bis(2,3-epoxycyclopentyl)ethane; 2,3-epoxycyclopentyl glycidyl ether; diglycidyl cyclohexane-1,2-dicarboxylate; 3,4-epoxycyclohexyl glycidyl ether; bis-(2,3-epoxycyclopentyl) ether; bis-(3,4-epoxycyclopentyl) ether; 5(6)-glycidyl-2-(1,2-epoxyethyl)bicyclo[2.2.1]heptane; cyclohexa-1,3-diene dioxide; 3,4-epoxy-6-methylcyclohexylmethyl 3',4'-epoxy-6'-methylcyclohexanecarboxylate. Also suitable are epoxy resins in which the 1,2-epoxy groups are attached to various heteroatoms or functional groups; such compounds include, for example, the N,N,O-triglycidyl derivative of 4-aminophenol, the N,N,O-triglycidyl derivative of 3-aminophenol, the glycidyl ether.glycidyl ester of salicylic acid, N-glycidyl-N'-(2-glycidylloxypropyl)-5,5-dimethylhydantoin or 2-glycidyl-1,3-bis-(5,5-dimethyl-1-glycidylhydantoin-3yl)-propane. Mixtures of cycloaliphatic epoxy resins are also suitable.


Cycloaliphatic epoxies are another group of epoxies useful as the resin in the present invention. They are usually low viscosity liquids at room temperature and can either be used alone or as reactive diluents in blends with semi-solid glycidyl ether epoxies. The Cycloaliphatic epoxies suitable for the present invention include 3',4'-epoxycyclohexylmethyl 3,4-epoxycyclohexanecarboxylate, which is available from Union Carbide Corporation under the trademark ERL-4221 and from Ciba-Geigy Corporation under the trademark ARALDITE CY-179, diglycidylester of hexahydrophthalic anhydride, which is available from Ciba-Geigy Corporation under the trademark ARALDIT CY-184, bis (3,4-epoxycyclohexylmethyl) adipate, which is available from Union Carbide Corporation under the trademark ERL-4299, the isomeric mixture of bis (2, 3-epoxycyclopentyl) ether, which was available from Union Carbide Corporation under the trademark ERL-4205, ERL-4205 reacted with ethylene glycol or blended with bisphenol A based diglycidyl ether, which were available from Union Carbide Corporation under the trademarks ERLB-4617 and ERL-2258, respectively.

~~The cycloaliphatic epoxy resins have a preferred epoxy equivalent weight of from about 50 to about 500, preferably from about 50 to about 250. The cycloaliphatic epoxy resins have a viscosity less than about 1000 cps (centipoise) at 25°C, preferably about 5 to about 900 cps, more preferably about 300 to about 600 cps, and most~~

817 preferably about 300 to about 450 cps. The cycloaliphatic epoxy resins have a molecular weight of from about 200 to 700, preferably 200 to 500, and a weight per epoxide of 50 to 500, preferably 50 to 300.

Photoinduced polymerizable cyanate ester compositions and a process for making these compositions and their use in encapsulating solder connections of electronic components, comprising a cationically polymerizable cyanate monomer, prepolymer and mixtures thereof, an effective amount of modifier to enhance the fracture properties of a bond, a filler, and a catalytically effective amount of an organometallic complex salt as polymerization initiator, which upon photolysis is capable of liberating at least one coordination site, and the metal cation in the organometallic complex is selected from elements of the Periodic Groups IVB, VB, VIB, VIIB, and VIIIB are also disclosed here.

The cyanate esters that can be employed pursuant to the present invention have two or more OCN groups and are curable through cyclotrimerization. The cyanate esters can be monomeric or less preferably polymeric, including oligomers and can be represented by those materials containing the following group:

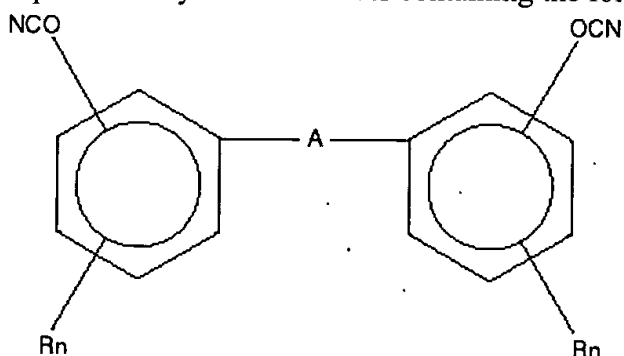

wherein:


A is a single bond,  $C(CH_3)_2$ ,  $SO_2$ ,  $O$ ,  $C(CF_2)_2$ ,  $CH_2OCH_2$ ,  $S$ ,  $C(=O)$ ,  $OC(=O)$ ,  $S(=O)$ ,  $OP(=O)O$ ,  $OP(=O)(=O)O$ ; divalent alkylene radicals such as  $CH_2$  and  $C(CH_3)_2$ , divalent alkylene radicals interrupted by heteroatoms on the chain such as  $O$ ,  $S$ , and  $N$ ; and  $R$  is selected from the group of hydrogen, halogens, and alkyl groups containing from 1 to 9 carbon atoms; and  $n$  is an integer from 0 to 4.

Specific cyanate esters that can be employed in the present invention are available and well-known and include those discussed in U.S. Pat. No.(s) 4,195,132, 3,681,292, 4,740,584, 4,745,215, 4,477,629, and 4,546,131; European patent

application EP0147548/82, and German Laid Open Patent Application 2611796, disclosures of which are incorporated herein by reference.

Suitable polyfunctional cyanates are prepared by well known methods, for example by reacting the corresponding polyvalent phenol with a halogenated cyanate in the presence of a tertiary amine such as triethyl amine as exemplified in U.S. Patent Nos. 3,553,244, 3,740,348, and 3,755,402.

The phenol reactant can be any aromatic compound containing one or more reactive hydroxyl groups. The phenolic reactant is preferable a di- or tri- polyhydroxy compound with the structure:

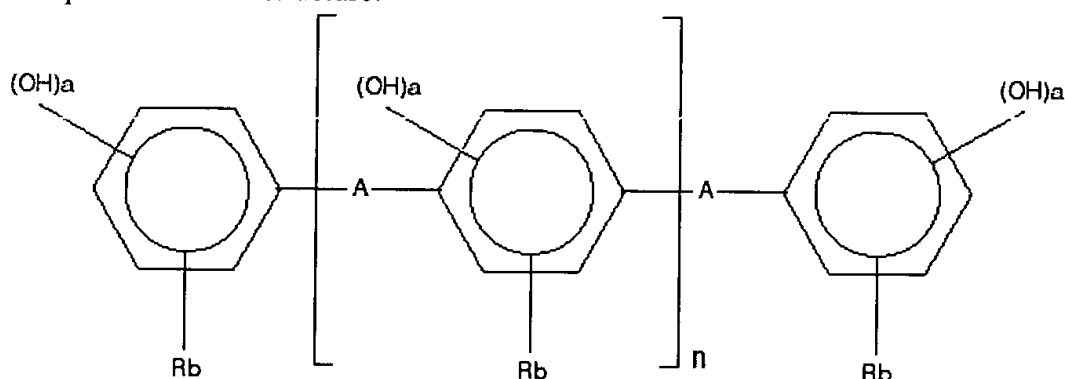

in which each a and b is independently 0, 1, 2, or 3, and at least one a is not 0; n is within the range of 0 to about 8, preferably 0 to 3; each R is independently selected from non-interfering alkyl, aryl, alkaryl, heteroatomic, heterocyclic, carbonyloxy, carboxy, and the like ring substituents, such as hydrogen, C<sub>1-6</sub> alkyl, C<sub>1-6</sub> allyl, C<sub>1-6</sub> alkoxy, halogen, maleimide, propargyl ether, glycidyl ether, and the like; and A is a polyvalent linking moiety which can be, for example, aromatic, aliphatic, cycloaliphatic, polycyclic, and heteroatomic. Examples of the linking moiety A include -O-, -SO<sub>2</sub>-, -CO-, -OCOO-, -S-, C<sub>1-12</sub>-, dicyclopentadienyl, aralkyl, aryl, cycloaliphatic, and a direct bond.

Examples of cyanates are as follows: cyanatobenzene, 1,3- and 1,4-dicyanatobenzene, 2-tert-butyl-1,4-dicyanatobenzene, 2,4-dimethyl-1,3-dicyanatobenzene, 2,5-ditert-butyl-1,4-dicyanatobenzene, tetramethyl-1,3-dicyanatobenzene, 4-chloro-1,3-dicyanatobenzene, 1,3,5-tricyanatobenzene, 2,2' or 4,4'-dicyanobiphenyl, 3,3',5,5'-tetramethyl-4,4'-dicyanobiphenyl, 1,3-, 1,4-, 1,5-, 1,6-,

1,8-, 2,6-, or 2,7- dicyanatonaphthalene, 1,3,6-tricyanatonaphthalene, bis(4-cyanatophenyl)methane, bis(3-chloro-4-cyanatophenyl)methane, 2,2-bis(4-cyanatophenyl)propane, 2,2-bis(3,5-dichloro-4- cyanatophenyl)propane, 2,2-bis(3,5-dibromo-4- cyanatophenyl)propane, bis(4-cyanatophenyl)ether, bis(p-cyanophenoxyphenoxy)-benzene, di(4-cyanatophenyl)ketone, bis(4-cyanatophenyl)thioether, bis(4-cyanatophenyl)sulfone, tris (4-cyanatophenyl)phosphite, and tris(4-cyanatophenyl)phosphate. Also useful are cyanic acid esters derived from phenolic resins as disclosed in U.S. Patent No. 3,962,184, cyanated novolak derived from novolak described in U.S. Patent No. 4,022,755, cyanated bisphenol type poly carbonate oligomer derived from bisphenol types polycarbonate oligomer listed in U.S. Patent No. 4,026,913, cyanato-terminated polyarylene ethers listed in U.S. Patent No. 3,595,900, dicyanate esters free or ortho hydrogen atoms described in U.S. Patent No. 4,740,584, mixtures of di-and tricyanates listed in U.S. Patent No. 4,709,008, polyaromatic cyanates containing polycyclic aliphatic diradicals such as XU7178, Dow Chemical Co., of U.S. Patent No. 4,528,366, fluorocarbon cyanates described in U.S. Patent No. 3,733,349, and other novel cyanate compositions taught in U.S. Patent Nos. 4,195,132 and 4,116,946, all of which are incorporated herein by reference. A discussion of such can be found in Bogan, et al., "Unique Polyaromatic Cyanate Ester for Low Dielectric Printed Circuit Boards", SAMPE Journal, Vol. 24, No. 6, Nov/Dec 1988. A preferred polyfunctional cyanate ester is Bisphenol AD dicyanate (4,4'-ethylidene bisphenol dicyanate) available from Ciba under the trade designation Arocy L-10, and bisphenol M dicyanate commercially available as RTX-366 from Ciba-Giegy.

Other suitable cyanate ester resins include the commercial products available under the designations REX-378, REX-379, Arocy B-10, B-30, B-40S, B-50, Arocy M-10, M-20, M-30, M-40S, M-50, Arocy F-40S, and F-10 from Ciba-Giegy.

Several classes of cationic photoinitiators have been found and their use in combination with epoxies is described by G. E. Green, B. P. Stark, and S. A. Zahir, in J. Macromol. Sci. Revs. Macromol. Chem. C21, 187 (1981/82). However, a significant number of these initiators are too slow to be of any practical value. Commercially the most significant catalysts are the aryldiazonium, triphenylsulfonium and diphenyliodonium salts, with the most recently found compounds the diaryliodosyl and triarylsulfoxonium salts which possess anions of low nucleophilicity. These are known

to liberate, upon irradiation, the corresponding Lewis acids  $\text{BF}_3$ ,  $\text{BF}_5$  etc., or the Bronsted acids  $\text{HB}_4$ ,  $\text{HPF}_6$ ,  $\text{HAsF}_6$ .

The effectiveness of aryldiazonium salts as photoinitiators depends on the structure of either the cationic and the anionic moieties of these salts. Their spectral sensitivity can be varied by modifying the structure of the aryl part of the aryldiazonium compound. Such class of photoinitiators requires generally a thermal post treatment step after irradiation to achieve satisfactory cure of the epoxy resin. However, several drawbacks such as nitrogen evolution during the photolysis step and their poor thermal stability and inherent moisture sensitivity limit the use of aryldiazonium salts as photoinitiators in a number of practical applications for epoxy curing.

Crivello in "Developments in Polymer Photochemistry 2" (N.S. Allen ed.), P. 1 Applied Science Publ., London, 1981, postulated that homolytic cleavage of one of the aryl bonds induced by a photochemical reaction is the first reaction step, then a subsequent hydrogen abstraction from a suitable donor, followed by loss of a proton yields the Bronsted acid  $\text{HX}$ . This strong Bronsted acid  $\text{HX}$ , protonates the oxirane group as the initial step with subsequent ring opening polymerization taking place. Generally, only "onium" salts with anions  $\text{BF}_4^-$ ,  $\text{PF}_6^-$ ,  $\text{AsF}_6^-$  or  $\text{SbF}_6^-$  can be used, with the polymerization rate increasing according to the sequence given before. Cycloaliphatic epoxies show higher reactivities than the glycidyl ethers and glycidyl esters. Most of the examples reported to date, involve organometallic complexes that possess photolabile ligands such as carbon monoxide, olefins, and carbocyclic rings, as described by D. M. Allen, J. Photog. Sci. 24 61 (1976) and H. Curtis, E. Irving, B. F. G. Johnson, Chem. Brit. 22 327 (1986).

Numerous organometallic compounds, such as organometal carbonyl compounds, metallocenes and aluminium complexes can act as photoinitiators in the polymerization of epoxy functionalized polymers. K. Meier and H. Zweifel, J. Imag. Sci. 30, 174 (1986) have described iron- arene salts having anions with low nucleophilicity. The photolysis of these compounds produces Lewis acids which can polymerize epoxy resins relatively easy.

The development of insoluble networks require a thermal activation step after the exposure step. Imaging systems with high resolution can be produced. Iron arene salts are generally prepared from the ferrocene according to the method reported by N.

A. Nesmeyanov et al., Dokl. Akad. Nauk SSSR 149, 615 (1963).

Cyanate ester resins are made from polyfunctional cyanate monomers as described in U.S. Patent No. 4,094,852. Generally, a catalyst is employed to achieve lower curing temperatures and faster curing times. Thermally activated catalysts which are effective include acids, bases, salts, nitrogen and phosphorous compounds, i.e., Lewis acids such as  $\text{AlCl}_3$ ,  $\text{BF}_3$ ,  $\text{FeCl}_3$ ,  $\text{TiCl}_4$ ,  $\text{ZnCl}_2$ ,  $\text{SnCl}_4$ ; Bronsted acids such as  $\text{HCl}$ ,  $\text{H}_3\text{PO}_4$ , aromatic hydroxy compounds such as phenol, p-nitrophenol, pyrocatechol, dihydroxynaphthalene; various other compounds such as sodium hydroxide, sodium methoxide, sodium phenoxide, trimethylamine, triethylamine, tributylamine, diazabicyclo-2,2,2-octane, quinoline, isoquinoline, tetrahydroquinoline, tetraethylammonium chloride, pyridine-N-oxide, tributylphosphine, zinc octoate, tin octoate, zinc naphthenate, and mixtures thereof. U. S. Patent No. 3,694,410 discloses the use of chelates of metal ions of the ionic or nonionic type with 1 to 6 or more chelate rings, to catalyze the formation of triazines from aromatic polyfunctional cyanates. Similarly, U. S. Patent No. 4,528,366 have shown that cobalt salts of  $\text{C}_6$ - $\text{C}_{20}$  carboxylic acids are useful catalysts for triazine formation, preferably cobalt octoate and cobalt naphthenate. U. S. Patent Nos. 4,604,452 and 4,608,434 disclose that alcoholic solutions of metal carboxylates are effective catalyst compositions for triazine formation by heating. Organometallic cobalt compounds have been used to catalyze the trimerization of acetylenes U. S. Patent No. 4,183,864 and the co-trimerization of acetylenes and nitriles U. S. Patent No. 4,328,343. The photocatalyzed trimerization of aryl isocyanates using metal carbonyl complexes has been disclosed by E. Martelli, C. Pellizzi, and G. Predieri, J. Molec. Catalysis 22, 89-91 (1983)). Energy polymerizable compositions comprising ionic salts of organometallic complex cations and cationically sensitive materials and the curing thereof has been taught. European Patent Nos. 109,851; 094,914; and 094,915. U. S. Patent No. 4,554,346 discloses photocurable resins from cyanate ester compounds. The inventors used mixtures of polyfunctional cyanate esters with at least one compound having hydroxy groups and radical-polymerizable unsaturated double bonds, the compounds used in quantities such that the ratio of cyanato groups to the hydroxy groups is in the range from 1:0.1 to about 1:2, and a radical polymerization photoinitiator, at elevated temperature. These materials would not be expected to yield the same polytriazine materials which can be obtained



from direct polymerization of the cyanates only.

Organometallic compounds useful in the present invention can be prepared as described in the literature methods and as known to those skilled in the art; examples are shown in Inorg. Chem. 17, 1003 (1978), Chem. Ber. 102, 2449 (1969), J.  
5 Organomet. Chem. 135, 373 (1977), Inorg. Chem. 18, 553 (1979), those methods disclosed in EP 109851, EP 094914, EP 094915 and EP 0109851.

The curing agent can be present in the range of 0.01 to 20, preferably 0.1 to 10 weight percent of the total composition.

10 Surfactants in amounts of about 0.5% to about 3% and preferably about 1.2% to about 1.6% can be used to facilitate mixing the filler with the epoxy. Suitable surfactants include non-ionic type surface active agents such as Triton X-100 from Rohm and Haas Co. These surface active agents are prepared by the reaction of octylphenol or nonylphenol with ethylene oxide. Products of the above series of compounds include the Octylphenol Series and Nonylphenol Series.

15 The composition may optionally contain other curing promoters or accelerators and various other materials such as plasticizers, elastomers, fillers, pigments, mold release agents or other resins.

20 Surface treating agents that may be used in this invention are, for instance, vinyltrimethoxysilane, vinyltriethoxysilane, N(2-aminoethyl)3-aminopropyl methyldimethoxysilane, 3-aminopropylethoxysilane, 3- glycidoxypopyl trimethoxysilane, 3-glycidoxypopylmethyl dimethoxysilane. The amount of the surface treating agent used is preferably from 1 to 20 parts, more preferably from 3 to 15 parts, with respect to 100 parts of resin.

25 Fillers that are thermally conductive and electrically insulating fillers could be used for improving the thermal heat transfer from the device to the surroundings. Such fillers include Aluminum Oxide, 92% Alumina, 96% Alumina, Aluminum Nitride, Silicon Nitride, Silicon Carbide, Beryllium Oxide, Boron Nitride and Diamond powder either high pressure or Plasma CVD.

30 The compositions of the present invention contain about 25% to about 60% by weight and preferably about 50% to about 60% by weight of the binder, and correspondingly about 40% to about 75% by weight and preferably about 50% to about 60% by weight of the filler. These amounts are based upon the total amounts of binder

and filler in the composition. When the binder includes the polyepoxide, the compositions employed in the present invention also include a hardening or curing agent.

5 The silica is preferably a fused or amorphous silica. The particle size of the filler should be 31 microns or less, and preferably from about 0.5 microns to about 31 microns, and most preferably from about 0.7 to about 20 microns. This is necessary so that the uncured material flows readily before polymerization, and so that the composition will flow under the integrated circuit chip housing 31, between the housing 31 and the substrate 11. In addition the silica filler should be substantially free of ionics and ionic impurities which might contribute to reliability problems.

10 The compositions of the present invention contain from about 25 percent to about 60 percent by weight, and preferably from about 50 percent to about 60 percent by weight of the liquid or flowable organic resin, balance a suitable filler capable of reducing the coefficient of thermal expansion.

15 Cure is effected by a presence of an effective amount, e.g., from about 0.5 weight percent to about 5 weight percent, basis epoxide, silica, and photoinitiator, of a suitable photoinitiator. One such photoinitiator is a 50 weight percent solution of triarylsulfonium antimonate salts (CAS Registry Numbers 89452-37-9 and 71449-8-0) in propylene carbonate. One such photoinitiator is Union Carbide Cyacure UVI-6974.

~~Preferably, the resin-photoinitiator-filler compositions or blends of the present invention further include a toughening agent to improve the fracture properties of the compositions. The toughening agent is preferably miscible with <sup>or</sup> capable of forming a stable suspension in the compositions. Further, when added to the compositions, the toughening agent preferably does not interfere with the cationic curing mechanism of the compositions and does not significantly affect the thermal and mechanical properties of the cured resin compositions. To achieve high glass transition temperatures and improve mechanical properties, e.g., toughness, the resin compositions preferably includes toughening agents that have options such as thermoplastics, hydroxy-containing thermoplastic oligomer, epoxy or other organic functional reactive-containing thermoplastic oligomer, reactive flexibilizer, rubber, elastomer, or any mixtures thereof. A variety of toughening agents can be used with thermally or cationic cured epoxy resins, which typically use an amine coreactant of hardener for cross~~

25  
30

linking. Preferred toughening agents include rubber or elastomers, either as discrete particles or reacted with the epoxy resins, epoxy functionalized flexibilizers, engineering thermoplastics, and amine or hydroxy-terminated thermoplastic oligomers.

The toughening agents and flexibilizers can benefit from high molecular weight engineering thermoplastics for increasing the toughness of the thermally or radiatively cured epoxy or epoxy-triazine mixtures utilized as binding matrices. Polysulfones such as those available from Amoco Performance Products, Inc. under the trademarks UDEL and RADEL can be dissolved in the epoxy resin-initiator composition to form a viscous homogeneous mixture. After curing, its toughness is significantly superior in comparison with the untoughened resin. Similar results can be obtained with a polyetherimide, which is available from General Electric Company under the trademark ULTEM. Although preferred the thermoplastic is not necessary to be miscible with the triazine or triazine epoxy resin-initiator composition. The fracture toughness of the cured resin can be further improved by adding Nylon 12 and Nylon 6/12 particles, ELF ATOCHEM ORGASO 2001 and ORGASOL 3501, or IMITEC X-902 polyimide particles, even though these material are insoluble in the epoxy resin monomer mixture. Other thermoplastics such as, for example, polyamideimides, poly(arylene ethers), polyesters, polyarylates, polycarbonates, polyurethanes, etc., are potentially useful as toughening agents in accordance with the present invention. Further examples can be found in "Engineering Plastics" by D. C. Clagett in Encyclopedia of Polymer Science and Engineering, John Wiley and Sons.

Engineering thermoplastics are typically end capped with nonreactive functional groups. In accordance with an embodiment of the present invention, the toughening agent is preferably a low molecular weight segment of oligomer of a aforementioned thermoplastics, which contains functional groups capable of reaction with the cyanate or epoxy-cyanate resin during the radiation induced polymerization. Accordingly, thermoplastic materials that have been modified to contain a thermoplastic oligomer backbone and to have more reactive end groups are particularly useful as the toughening agents. For this purpose, hydroxy-terminated polysulfone oligomers based on the UDEL P-1700 polymer backbone can be synthesized at various molecular weights. These materials can be easily blended with the resin monomer-photoinitiator mixture and the resulting compositions are less viscous than those having the same percentage

of high molecular weight polymer of similar backbone, but with different end groups.

The materials are also effective in increasing fracture toughness of the cured resin.

Oligomers with other backbones such as, for example, poly (arylene ethers), polyarylates, and polyester, can also be used. In accordance with the present invention,

any of the aforementioned thermoplastics could function as the oligomer backbone.

~~Reactive end groups are capable of reacting with the cyanate-epoxy resin during~~

the cationic polymerization. By way of example, the reactive end groups of the present invention include hydroxy, epoxy, and carboxylate groups. Flexible molecules

containing <sup>two</sup> or more epoxy groups can also be used as the toughening agents in the present invention. These molecules typically contain long aliphatic groups that act to reduce cross link density in the cured epoxy resin. In addition to increasing the fracture toughness of the cured resin, the addition of low viscosity flexibilizers can also

significantly the overall viscosity of the uncured resin-initiator-flexibilizer mixture.

Suitable flexibilizers for the present invention include, but are not limited to, 1,4-

butane-diol diglycidyl ethers such as those from Shell Chemical Company under the

trademark HELOXY MODIFIER 67, neopentylglycol diglycidyl ether such as that from Shell Chemical Company under the trademark HELOXY MODIFIER 107, trimethylol

ethane triglycidyl ethers such as those from Shell Chemical Company under the

trademark HELOXY MODIFIER 44, dibromoneopentylglycol glycidyl ethers such as

those from Shell Chemical Company under the trademark HELOXY MODIFIER 56,

propoxylated glycerol polyglycidyl ether such as that from Shell Chemical Company

under the trademark HELOXY MODIFIER 84, polypropylene glycol glycidyl ether

such as that from Shell Chemical Company under the trademark HELOXY MODIFIER

32, polyglycidyl ether of castor oil such as that from Shell Chemical Company under the

trademark HELOXY MODIFIER 505, dimer acid diglycidyl esters such as those from

Shell Chemical Company under the trademark HELOXY MODIFIER 71, resorcinol

diglycidyl ether such as that from Shell Chemical Company under the trademark

HELOXY 59, epoxidized propylene glycol dioleates such as that under the trademark

ELF ATOCHEM VIKOFLES 4050, 1,2-teradecane oxides such as those under the

trademark ELF ATOCHEM VIKOFLES 14, internally epoxidized 1,3-butadiene

homopolymers such as those under the trademarks ELF ATOCHEM POLY BD 600 and

~~POLY BD 605, diglycidyl ether, glycidyl glycidates, bis (2,3-epoxy-2-methylpropyl)~~

*Ins. B5 cont.* ~~ether, and polyglycol diepoxides such as those from DOW Chemical Company under the trademarks DER 732 and DER 736. Flexible molecules containing two or more hydroxy groups can also be used as the toughening agents in accordance with the present invention. These flexible polyol compounds contain long aliphatic groups.~~

5 Useful polyols include E-caprolactone triol such as those from Union Carbide Corporation under the trademarks TONE 0301, TONE 0305, and TONE 0310.

*Ins. B6* ~~Elastomeric units such as elastomers or rubbers that can be used in the composition of the present invention include, but are not limited to, copolymers of styrene, butadiene, and ethylene or styrene, butylene, and ethylene such as that from Shell Chemical Company under the trademark CRATON RUBBER, butadiene, styrene copolymers, copolymers of butadiene and styrene, butyl rubber, neoprene rubber, and poly (siloxanes). Functionalized versions of these materials are particularly useful. Epoxy resin monomers may be reacted with these materials to form an epoxy terminated elastomer that can be used as toughening agents. Maleic anhydride terminated KRATON rubber, e.g., Fg 1901X from Shell Chemical Company, and epoxy functionalized liquid KRATON rubber, e.g., EXP-206 and EKP-207 from Shell Chemical Company, can also be used as the toughening agents.~~

*Ins. B7* ~~It is also advantageous to blend various types of toughening agents or flexibilizers in order to achieved desirable toughness through different toughening mechanisms and to adjust the overall viscosity of a thermoplastics or thermoplastic oligomer dissolved in an epoxy resin monomer. The overall viscosity may be reduced and the toughness may be improved in comparison with using a single toughening agent or flexibilizer. The thermoplastics may separate from the cured epoxy-cyanate resin to form a two phase morphology while the flexibiizer provides long flexible groups connect cross link sites in the network.~~

*Ins. B8* ~~Elastomeric units which are endcapped with reactive function groups can be used as the toughening agents. For example, fluoridized rubbers and polysiloxanes with terminally functional groups and hydroxylated or carboxylated EPDM rubber can also be used as the toughening agents in accordance with the present invention.~~

30 In accordance with preferred embodiments of the present invention, the molecular weight of the toughening agents range between approximately 400 and approximately 20,000, more preferably between approximately 500 and approximately

5,000. The toughening agents are preferably added to the composition in an amount between approximately 4% and approximately 30% by weight.

5 A series of tests were carried out with Union Carbide ERL 4221 3,4-epoxycyclohexylmethyl-3,4-epoxycyclohexane carboxylate, Novacup L337 silica, and Union Carbide Cyracure UVI-6974 triarylsulfonium antimonate salts in propylene carbonate (50 weight percent triarylsulfonium antimonate salts, basis total triarylsulfonium antimonate salts and propylene carbonate).

#### Example 1

10 A set of experiments were performed in which equal amounts of Novacup L337 silica filler and Union Carbide ERL-4221 cycloaliphatic epoxy resin was mixed with varying amounts (0, 0.25, 0.5, 1.25, and 5%) of Union Carbide Cyracure UVI-6974 photoinitiator. The mixtures were added to aluminum sample holders and processed. The process varied from 0 to 2 min UV exposure, 0 to 280 minutes hold time, and 60 to 100 degrees C bake temperatures for 10 minutes. The thickness of the cured material  
15 resulting after a methyl ethyl ketone removal of uncured resin was recorded.

The results indicated that UV exposure was required. No material was hardened with bake only. Maximum thickness was obtained with 0.5% photoinitiator. The higher temperature bake gave greater thickness. The cured material after the lower temperature bake, while thinner, was also more flexible.

#### 20 Example 2

The following statistically designed experiment was performed to optimize depth of cure and determine the effect of various parameters. A "master" mixture was prepared by weighing 25 g of Novacup L337 silica filler into a 100 ml plastic beaker. To this was added 25 g of Union Carbide ERL-4221 cycloaliphatic resin. This was  
25 mixed by hand with a glass stirring rod to a smooth consistency. This mixture was divided into two 20 g portions. To one beaker was added 0.24 g of Union Carbide Cyracure UVI-6974 (50% mixture of photoinitiator in propylene carbonate). To the other beaker was added 2.0 g of Cyracure UVI-6974. Portions of each mixture were added to eight 30 x 30 x 4 mm aluminum caps. Each cap was exposed to a 5 mW/sq.  
30 cm. mercury lamp for the times indicated below. The caps were processed as indicated

in the table. Baking was done in either a Fisher Isotemp or a Blue M oven by first bringing oven to temperature then inserting parts for time indicated. After processing the cured material was removed from the cap and rinsed in methyl ethyl ketone. This removes the lower uncured material, only the top portion of the resin cures. The thickness of the cured material was measured with a Federal model 6918-R2 bench micrometer taking the average of several readings.

Table I

	Run	Initiator (%)	Exposure Dose (sec)	Hold Time (hours)	Bake Temperature (°C)	Bake Time (min)	Cure Thickness (mils)
10	1	0.5	30	0	80	10	23.8
	2	0.5	30	2	120	10	111.1
	3	0.5	180	0	120	20	100.3
	4	0.5	180	2	80	20	46.9
	5	5.0	30	0	120	20	38.4
15	6	5.0	30	2	80	20	28.8
	7	5.0	180	0	80	10	37.7, 38.5
	8	5.0	180	2	120	10	49.4
	9	5.0	180	2	120	20	60.8
	10	5.0	180	0	80	20	45.2, 35.8
20	11	5.0	30	2	80	10	28.7, 24.5
	12	5.0	30	0	120	10	33.5
	13	0.5	180	2	80	10	42.2, 45.6
	14	0.5	180	0	120	10	72.1
	15	0.5	30	2	120	20	143.8
25	16	0.5	30	0	80	20	39.0

### Example 3

A mixture of resins were prepared in a glass beaker by heating on a hot plate 1 g of Epon 1007 and 9 g of ERL-4221. The hot plate was maintained at 140-150°C for 3 hours until the Epon 1007 dissolved. While warm, 0.01 g of ethyl violet dye and then 15 g of Novacup L337 silica was added and mixed with a stir rod. The dark blue mixture was viscous when cool. The mixture was applied with a stir rod to the leads on a circuitized ceramic test substrate. The substrate was exposed for 2 minutes under the 5 mW/sq. cm. mercury lamp, then baked at 120°C for 5 minutes. The surface had

hardened. The ceramic was cooled to -70°C several times in a freezer and warmed to room temperature. A crack was observed at a bubbled area in the applied material otherwise the integrity and adhesion were good.

The set of sixteen runs carried out, with 0.5 weight percent to 5 weight percent initiator, a UV exposure dose of 30 to 180 seconds, a hold time of 0 to 2 hours, a bake temperature of 80 to 120 degrees Celsius, and a bake time of 10 to 20 minutes. Cure thickness of 23.0 mils to 143.8 mils were obtained. An R squared analysis of this data was performed. It was determined that initiator concentration (significance level 0.021046) and bake temperature (significance level 0.0079883) were the most significant variables.

#### Example 4

A homogeneous liquid mixture was prepared by mixing 10 grams of Arocy L10 from Ciba, 0.1 gram of 10% solution of 8% Zn octanoate in mineral spirits from Mooney Chemicals and 0.15 gram of Irgacure 261 from Ciba-Geigy Corporation. To this solution 15 g of Novacup L337 silica was added and mixed with a stir rod.

Alternatively another mixture was prepared by adding 5 gr of Arocy L10, 5 gr of MR283-250, 0.1 gram of Zn Octanoate and 0.15 gram of Irgacure 261 were added. To this solution 17 g of Novacup L337 silica was added and mixed with a stir rod.

Each sample was roll milled for 1 hour after addition and vacuum degassed to remove the entrapped air. Coatings (2 mils) of these mixtures were first baked for 15 min at 130°C, exposed for 300 sec (350 W Oriel Lamp) and baked at 150°C for 15 minutes. The resulting cured films appeared to be of good quality and do not appear to crack upon a 90 degree bend test.

The composition protects the soldered joints from the effects of thermal cycling.

Thus there has been shown and described an improved electronic package assembly wherein encapsulant material is utilized to reinforce the electrical connections formed between the assembly's package elements and the substrate on which this package is positioned. As stated, such a package assembly has exhibited an operational life substantially greater than non-protected package assemblies (those not including encapsulant or the like material). The package assembly as defined herein is capable of being manufactured using mass production techniques and thus benefit from the



advantages thereof. Although the invention has been defined with respect to low profile packages (those having a total height of only about 0.030 inch to about 0.050 inch, it is understood that the teachings herein are readily adaptable to other, higher profile package structures, including many of those well known in the art.

5           While there have been shown and described what are at present the preferred embodiments of the invention, it will be obvious to those skilled in the art that various changes and modifications may be made therein without departing from the scope of the invention as defined by the appended claims.

01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1041 1042 1043 1044 1045 1046 1047 1048 1049 1050 1051 1052 1053 1054 1055 1056 1057 1058 1059 1060 1061 1062 1063 1064 1065 1066 1067 1068 1069 1070 1071 1072 1073 1074 1075 1076 1077 1078 1079 1080 1081 1082 1083 1084 1085 1086 1087 1088 1089 1090 1091 1092 1093 1094 1095 1096 1097 1098 1099 1100 1101 1102 1103 1104 1105 1106 1107 1108 1109 1110 1111 1112 1113 1114 1115 1116 1117 1118 1119 1120 1121 1122 1123 1124 1125 1126 1127 1128 1129 1130 1131 1132 1133 1134 1135 1136 1137 1138 1139 1140 1141 1142 1143 1144 1145 1146 1147 1148 1149 1150 1151 1152 1153 1154 1155 1156 1157 1158 1159 1160 1161 1162 1163 1164 1165 1166 1167 1168 1169 1170 1171 1172 1173 1174 1175 1176 1177 1178 1179 1180 1181 1182 1183 1184 1185 1186 1187 1188 1189 1190 1191 1192 1193 1194 1195 1196 1197 1198 1199 1200 1201 1202 1203 1204 1205 1206 1207 1208 1209 1210 1211 1212 1213 1214 1215 1216 1217 1218 1219 1220 1221 1222 1223 1224 1225 1226 1227 1228 1229 1230 1231 1232 1233 1234 1235 1236 1237 1238 1239 1240 1241 1242 1243 1244 1245 1246 1247 1248 1249 1250 1251 1252 1253 1254 1255 1256 1257 1258 1259 1260 1261 1262 1263 1264 1265 1266 1267 1268 1269 1270 1271 1272 1273 1274 1275 1276 1277 1278 1279 1280 1281 1282 1283 1284 1285 1286 1287 1288 1289 1290 1291 1292 1293 1294 1295 1296 1297 1298 1299 1300 1301 1302 1303 1304 1305 1306 1307 1308 1309 1310 1311 1312 1313 1314 1315 1316 1317 1318 1319 1320 1321 1322 1323 1324 1325 1326 1327 1328 1329 1330 1331 1332 1333 1334 1335 1336 1337 1338 1339 1340 1341 1342 1343 1344 1345 1346 1347 1348 1349 1350 1351 1352 1353 1354 1355 1356 1357 1358 1359 1360 1361 1362 1363 1364 1365 1366 1367 1368 1369 1370 1371 1372 1373 1374 1375 1376 1377 1378 1379 1380 1381 1382 1383 1384 1385 1386 1387 1388 1389 1390 1391 1392 1393 1394 1395 1396 1397 1398 1399 1400 1401 1402 1403 1404 1405 1406 1407 1408 1409 1410 1411 1412 1413 1414 1415 1416 1417 1418 1419 1420 1421 1422 1423 1424 1425 1426 1427 1428 1429 1430 1431 1432 1433 1434 1435 1436 1437 1438 1439 1440 1441 1442 1443 1444 1445 1446 1447 1448 1449 1450 1451 1452 1453 1454 1455 1456 1457 1458 1459 1460 1461 1462 1463 1464 1465 1466 1467 1468 1469 1470 1471 1472 1473 1474 1475 1476 1477 1478 1479 1480 1481 1482 1483 1484 1485 1486 1487 1488 1489 1490 1491 1492 1493 1494 1495 1496 1497 1498 1499 1500 1501 1502 1503 1504 1505 1506 1507 1508 1509 1510 1511 1512 1513 1514 1515 1516 1517 1518 1519 1520 1521 1522 1523 1524 1525 1526 1527 1528 1529 1530 1531 1532 1533 1534 1535 1536 1537 1538 1539 1540 1541 1542 1543 1544 1545 1546 1547 1548 1549 1550 1551 1552 1553 1554 1555 1556 1557 1558 1559 1560 1561 1562 1563 1564 1565 1566 1567 1568 1569 1570 1571 1572 1573 1574 1575 1576 1577 1578 1579 1580 1581 1582 1583 1584 1585 1586 1587 1588 1589 1590 1591 1592 1593 1594 1595 1596 1597 1598 1599 1600 1601 1602 1603 1604 1605 1606 1607 1608 1609 1610 1611 1612 1613 1614 1615 1616 1617 1618 1619 1620 1621 1622 1623 1624 1625 1626 1627 1628 1629 1630 1631 1632 1633 1634 1635 1636 1637 1638 1639 1640 1641 1642 1643 1644 1645 1646 1647 1648 1649 1650 1651 1652 1653 1654 1655 1656 1657 1658 1659 1660 1661 1662 1663 1664 1665 1666 1667 1668 1669 1670 1671 1672 1673 1674 1675 1676 1677 1678 1679 1680 1681 1682 1683 1684 1685 1686 1687 1688 1689 1690 1691 1692 1693 1694 1695 1696 1697 1698 1699 1700 1701 1702 1703 1704 1705 1706 1707 1708 1709 1710 1711 1712 1713 1714 1715 1716 1717 1718 1719 1720 1721 1722 1723 1724 1725 1726 1727 1728 1729 1730 1731 1732 1733 1734 1735 1736 1737 1738 1739 1740 1741 1742 1743 1744 1745 1746 1747 1748 1749 1750 1751 1752 1753 1754 1755 1756 1757 1758 1759 1760 1761 1762 1763 1764 1765 1766 1767 1768 1769 1770 1771 1772 1773 1774 1775 1776 1777 1778 1779 1780 1781 1782 1783 1784 1785 1786 1787 1788 1789 1790 1791 1792 1793 1794 1795 1796 1797 1798 1799 1800 1801 1802 1803 1804 1805 1806 1807 1808 1809 1810 1811 1812 1813 1814 1815 1816 1817 1818 1819 1820 1821 1822 1823 1824 1825 1826 1827 1828 1829 1830 1831 1832 1833 1834 1835 1836 1837 1838 1839 1840 1841 1842 1843 1844 1845 1846 1847 1848 1849 1850 1851 1852 1853 1854 1855 1856 1857 1858 1859 1860 1861 1862 1863 1864 1865 1866 1867 1868 1869 1870 1871 1872 1873 1874 1875 1876 1877 1878 1879 1880 1881 1882 1883 1884 1885 1886 1887 1888 1889 1890 1891 1892 1893 1894 1895 1896 1897 1898 1899 1900 1901 1902 1903 1904 1905 1906 1907 1908 1909 1910 1911 1912 1913 1914 1915 1916 1917 1918 1919 1920 1921 1922 1923 1924 1925 1926 1927 1928 1929 1930 1931 1932 1933 1934 1935 1936 1937 1938 1939 1940 1941 1942 1943 1944 1945 1946 1947 1948 1949 1950 1951 1952 1953 1954 1955 1956 1957 1958 1959 1960 1961 1962 1963 1964 1965 1966 1967 1968 1969 1970 1971 1972 1973 1974 1975 1976 1977 1978 1979 1980 1981 1982 1983 1984 1985 1986 1987 1988 1989 1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636 2637 2638 2639 2640 2641 2642 2643 2644 2645 2646 2647 2648 2649 2650 2651 2652 2653 2